



BE-TV-FA-U/VH/VL

Genesis Elite Series Transmitters



The BE-TV™ GENESIS ELITE series transmitter line is specifically designed to meet the needs of the MPTV stations, providing an output power up to 600Wrms with OFDM modulations and up 5500Wrms with 8VSB modulations, in all broadcast bands.

It employs the latest components and technology, the result is an extremely reliable, easy to configure and maintain, transmitter/ transposer/gap-filler.

Two different modulation standards can be loaded and switchable both locally and by remote, allowing to reconfigure the unit according to the actual or future needs.

Highest efficiency provided by the latest LDMOS amplifier design.

It can be improved by using Doherty option.

Key Features & Benefits

- Extremely easy installation and maintenance
- Fully broadband on UHF or VHF bands
- Hot-pluggable amplifier modules
- High efficiency Doherty configuration on power amplifier *(option)*
- All digital and analog modulation standards
- GPS/GLONASS internal receiver *(hardware option)*
- High stability local oscillator *(hardware option)*
- Both SFN and MFN network mode
- Advanced modulator with automatic/adaptive precorrection *(linear and nonlinear)*
- ATSC and ATSC 3.0 operation without hardware change
- Satellite receiver with or without CAM *(hardware option)*
- Transposer or SFN gap-filler *(hardware option)* with echo cancellation
- Latest LDMOS technology for RF stages
- Display & keyboard, web browser and SNMP for remote operation
- Seamless switching between ASI/SMPTE and/or IP *(with priority)* when in SFN network mode
- Remote software/firmware upgrade
- Band-pass filter inside transmitter rack *(option)*

Made in Europe, Designed in Italy, supported from the USA

BE-TV-FA-U/VH/VL

Genesis Elite Series Transmitters



GENERAL

Frequency Range	UHF band IV/V: 470 to 862 MHz; VHF band III: 170-254 MHz; 1Hz steps
Analog Modulation Standards	B/G/D/K/K1/M/N, color system PAL, NTSC, SECAM
Digital Modulation Standards	ATSC 1.0; ATSC 3.0; DVB-T/T2; ISDB-Tb; DAB, DAB+
Channel Bandwidth	TV: 6, 7, or 8 MHz; DAB/DAB+: 1.5MHz
VSWR	Protection against open or short circuit, all phase angles.
Local oscillator accuracy	$\pm 1 \times 10^{-8}$ (0 to 70°C), $\pm 5 \times 10^{-10}$ /day (after 30 days), $\pm 1 \times 10^{-7}$ /year
Network mode	SFN and MFN; multiple PLP

RF INPUTS

GPS antenna	SMA female, 50 Ohms, (+5 V DC @ 100 mA max output for active antenna)
1 pps pulse	BNC female, 50 Ohms
10 MHz reference frequency	BNC female, 50 Ohms
F female, 75 Ohms	F female, 75 Ohms
Satellite receiver (with CAM)	F female, 75 Ohms

RF OUTPUT

RF Output connector	1 x Type N female, 50 Ohms
RF power setting	-7 to +0dB with reference to nominal power
RF Output power stability	< ± 0.25 dB
Amplitude flatness	< ± 0.25 dB
Harmonic Emission	< -60dBc
Spurious Emission	< -60dBc
10 MHz reference frequency	SMA female, 50 Ohms, 1Vpp/ ± 0.2 Vpp, rise-time 3-10ns

DIGITAL MODULATION INPUTS

TS over IP/EDI	2 x RJ45 10/100/1000BaseT
ASI/SMPTE-310/T2MI/ETI	2 x BNC female, 75 Ohms (DVB-H: 1 main/1 hierarchical), continuous and burst mode
Maximum bit rate	50 Mbps

ANALOG MODULATION INPUTS

Video	2 x BNC fem., 75 Ohms, 1Vpp ± 6 dB, AGC on ITS line, DC rest., sync rest., white limiter
Sound	2 x XLR31 mini, 600 Ohms or 5 kOhms, balanced or unbalanced, 0dBm -6/+21dB
Aux audio input	MPX (bw 120kHz): 1 x BNC female 50 Ohms or 5 kOhms; SCA: 1 x BNC female 50 Ohms
NICAM audio interface	2 x XLR 31 mini, 600 Ohms or 5 kOhms, balanced or unbalanced, 0dBm ± 10 dB
NICAM data interface	1 x BNC female, TTL 728kb/s external data, 1 x BNC female, TTL 728kb/s external clock

USER INTERFACE/ REMOTE CONTROL

Control/Monitoring	LCD and keyboard, Web GUI, SNMP
Ethernet	2x GbE

BE-TV-FA-U/VH/VL

Genesis Elite Series Transmitters



AC POWER

AC Input	100 to 240 Vac, single or two phases, 380Vac three-phases fou wires
Power Factor	> 0.95
Frequency	50 or 60 Hz

ENVIRONMENTAL

Operational Temperature Range	0° to 45°C (32° to 113°F)
Storage Temperature Range	-40 to +70°C
Relative Humidity	0% to 90%, non-condensing @ 45°C
Altitude	Up to 2,500 m (8,202 ft) above sea level
Cooling	Forced air-cooled
Acoustic Noise	≤65 dBA (front 1 m)
Dimensions (H x W x D)	24RU x 19"rack (dimensions: 1200 H x 600 W x 1100 D [mm]) 42RU x 19"rack (dimensions: 2000 H x 600 W x 1100 D [mm])

BE-TV-FA-U/VH/VL

Genesis Elite Series Transmitters





UHF BAND IV-V RF OUT POWER (before filter) [W]	Q.TY PA	OFDM MODULATION (DVB-T/T2, ATSC 3.0, ISDB-T)	8VSB MODULATION (ATSC 1.0)	VSB MODULATION (ATV) @ IMD TYP. -62DB
BE-TV-0k6-FA-U	1	600Wrms (MER=33dB)	750Wrms (MER=35dB)	1400Wps
BE-TV-1k2-FA-U	2	1200Wrms (MER=33dB)	1500Wrms (MER=35dB)	2800Wps
BE-TV-1k8-FA-U	3	1800Wrms (MER=33dB)	2200Wrms (MER=35dB)	4200Wps
BE-TV-2k4-FA-U	4	2400Wrms (MER=33dB)	3000Wrms (MER=35dB)	5500Wps
BE-TV-3k0-FA-U	5	3000Wrms (MER=33dB)	3750Wrms (MER=35dB)	7000Wps
BE-TV-3k6-FA-U	6	3600Wrms (MER=33dB)	4400Wrms (MER=35dB)	8200Wps

VHF BAND III RF OUT POWER (before filter) [W]	Q.TY PA	OFDM MODULATION (DVB-T/T2, ATSC 3.0, ISDB-T)	8VSB MODULATION (ATSC 1.0)	VSB MODULATION (ATV) @ IMD TYP. -62DB
BE-TV-0k7-FA-VH	1	750Wrms (MER=35dB)	950Wrms (MER=35dB)	1400Wps
BE-TV-1k5-FA-VH	2	1500Wrms (MER=35dB)	1850Wrms (MER=35dB)	2800Wps
BE-TV-2k2-FA-VH	3	2250Wrms (MER=35dB)	2800Wrms (MER=35dB)	4200Wps
BE-TV-3k0-FA-VH	4	3000Wrms (MER=35dB)	3750Wrms (MER=35dB)	5500Wps
BE-TV-3k7-FA-VH	5	3750Wrms (MER=35dB)	4700Wrms (MER=35dB)	7000Wps
BE-TV-4k4-FA-VH	6	4400Wrms (MER=35dB)	5500Wrms (MER=35dB)	8200Wps

VHF BAND III RF OUT POWER (before filter) [W]	Q.TY PA	OFDM MODULATION (DAB, DAB+)
BE-DA-1k0-FA-VH	1	1000Wrms (MER=32dB)
BE-DA-2k0-FA-VH	2	2000Wrms (MER=32dB)
BE-DA-3k0-FA-VH	3	3000Wrms (MER=32dB)

BE-TV-FA-U/VH/VL

Genesis Elite Series Transmitters

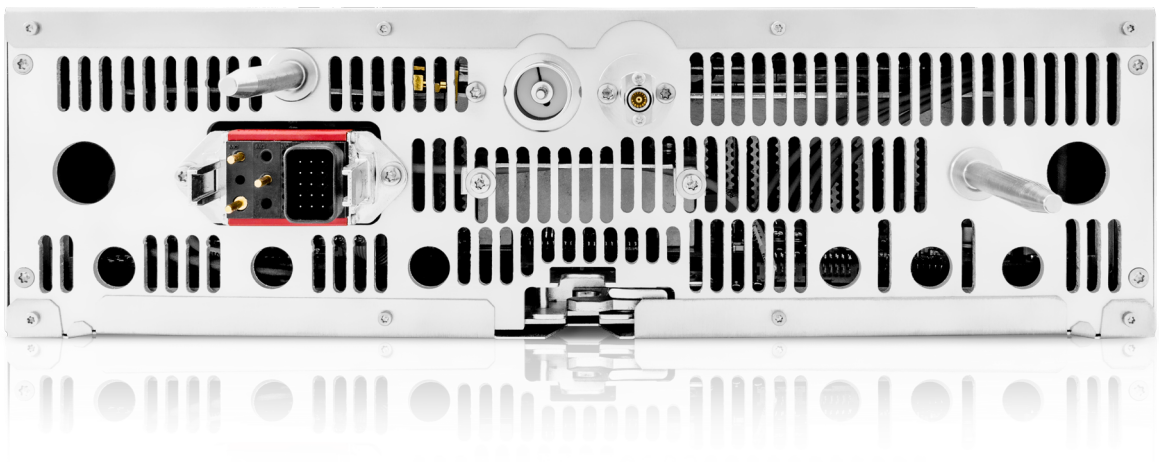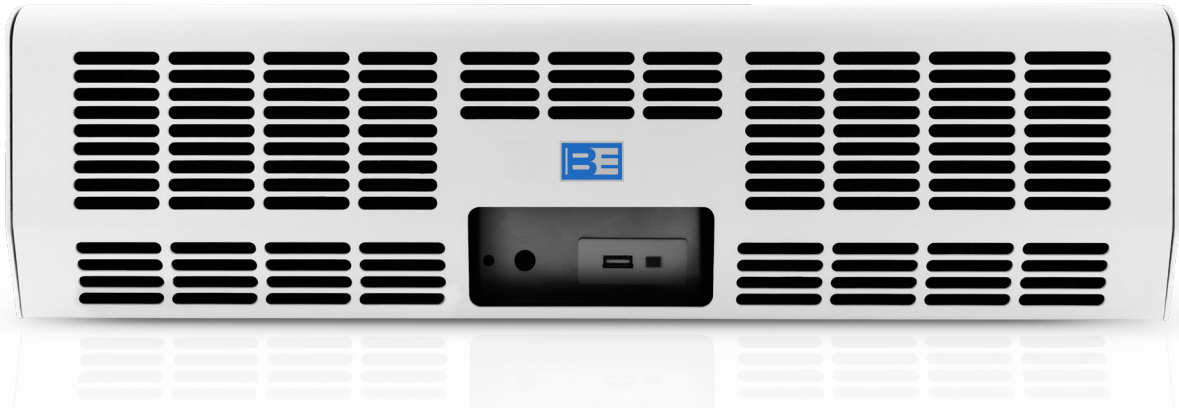



BE-TV-FA-U/VH/VL

Genesis Elite Series Transmitters

Taking the next step is easy with Broadcast Electronics. Contact your sales representative today to discuss solutions that will work for you and your station(s).

To contact your BE sales representative, simply visit our website at bdcast.com or call 217.224.9600 and learn more about what BE has to offer.

BE manufactures complete RF systems for radio and TV. Our products encompass program generation, audio and data management, interfacility transport and analog and digital (*HD Radio and DRM transmission*).

They are used daily in more than 40,000 installations in nearly 100 countries. For over sixty years, BE pioneering developments have set industry standards for innovation and reliability, while providing broadcasters with new options for operational productivity and income generation. BE is headquartered in Quincy, Illinois, USA, and is represented worldwide by a network of local representatives.

©2019 Broadcast Electronics. All rights reserved. Specifications are subject to change without notice. Broadcast Electronics and the BE logo are registered trademarks of BEI Electronics LLC. All other trademarks are property of their respective owners.



BE - Broadcast Electronics is part of Elenos Group
more information www.elenosgroup.com
Headquarters in Italy

Telephone (217) 224-9600

4100 North 24th Street — Quincy, Illinois 62305-3606 U.S.A

www.bdcast.com



Tomorrow's TV Today

