




BE-TV-FAU/VII

Genesis Compact Transmitters

Key Features & Benefits

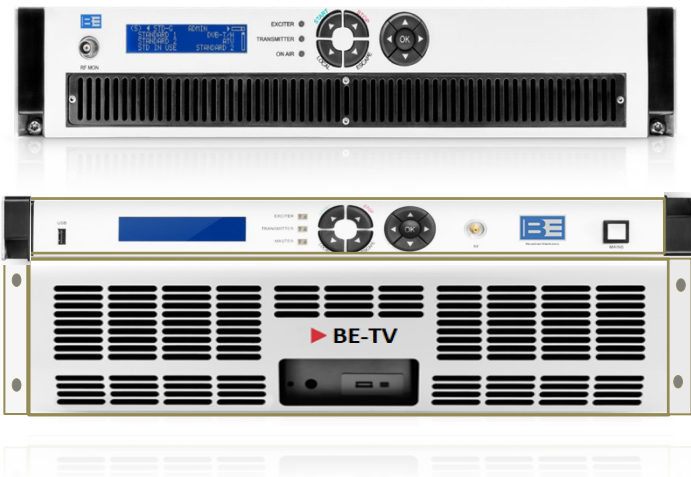

The BE-TV™ GENESIS Compact series transmitter line is specifically designed to meet the needs of the LPTV stations, providing an output power up to 600Wrms with OFDM modulation and up to 750Wrms with 8VSB modulation in UHF, 250 and 300W in VHF Band III.

It employs the latest components and technology, the result is an extremely reliable, easy to configure and maintain, transmitter/transposer/gap-filler.

Two different modulation standards can be loaded and switchable both locally and by remote, allowing to reconfigure the unit according to the actual or future needs.

Highest efficiency provided by the latest LDMOS amplifier design.

- Compact design (1, 2 or 4 rack units)
- Extremely easy installation and maintenance
- Fully broadband on UHF or VHF band III
- All digital and analog modulation standards
- GPS/GLONASS internal receiver (*hardware option*)
- High stability local oscillator (*hardware option*)
- Both SFN and MFN network mode
- Advanced modulator with automatic/adaptive pre-correction (*linear and nonlinear*)
- ATSC, ATSC 3.0, ISDB-T and DVB-T/T2 operation without hardware change
- Satellite receiver with or without CAM (*hardware option*)
- Transposer or SFN gap-filler (*hardware option*) with echo cancellation, including new ATSC/ATSC3.0 Translator receiver technology
- Low power consumption
- High efficiency air cooling with redundant fans
- Latest LDMOS technology for RF stages
- Display & keyboard, web browser and SNMP for remote operation
- Seamless switching between ASI/SMPTE and/or IP (*with priority*) when in SFN network mode
- Remote software/firmware upgrade

Made in Europe, Designed in Italy, supported from the USA



GENERAL

Frequency Range	UHF band IV/V: 470 to 862 MHz; VHF band III: 170-254 MHz; 1Hz steps
Analog Modulation Standards	B/G/D/K/K1/M/N, color system PAL, NTSC, SECAM
Digital Modulation Standards	ATSC 1.0; ATSC 3.0; DVB-T/T2; ISDB-Tb; DAB, DAB+
Channel Bandwidth	TV: 6, 7, or 8 MHz; DAB/DAB+: 1.5MHz
VSWR	Protection against open or short circuit, all phase angles.
Local oscillator accuracy	$\pm 1 \times 10^{-8}$ (0 to 70°C), $\pm 5 \times 10^{-10}$ /day (after 30 days), $\pm 1 \times 10^{-7}$ /year
Network mode	SFN and MFN; multiple PLP

RF INPUTS

GPS antenna	SMA female, 50 Ohms, (+5 V DC @ 100 mA max output for active antenna)
1 pps pulse	BNC female, 50 Ohms
10 MHz reference frequency	BNC female, 50 Ohms
F female, 75 Ohms	F female, 75 Ohms
Satellite receiver (with CAM)	F female, 75 Ohms

RF OUTPUT

RF Output connector	5,10, 100, and 200W: 1 x Type N female, 50 Ohms, 600W: 1 x 7-16 DIN connector, 50 Ohms
RF power setting	-7 to +0dB with reference to nominal power *BE-TV600-FAU/VIII operates at reduced power @110/120VAC
RF Output power stability	< +/- 0.25dB
Amplitude flatness	< +/- 0.25dB
Harmonic Emission	< -60dBc
Spurious Emission	< -60dBc
10 MHz reference frequency	SMA female, 50 Ohms, 1Vpp +/- 0.2Vpp, rise-time 3-10ns

DIGITAL MODULATION INPUTS

TS over IP/EDI	2 x RJ45 10/100/1000BaseT
ASI/SMPTE-310/T2MI/ETI	2 x BNC female, 75 Ohms (DVB-H: 1 main/1 hierarchical), continuous and burst mode
Maximum bit rate	50 Mbps

ANALOG MODULATION INPUTS

Video	2 x BNC fem., 75 Ohms, 1Vpp +/- 6dB, AGC on ITS line, DC rest., sync rest., white limiter
Sound	2 x XLR31 mini, 600 Ohms or 5 kOhms, balanced or unbalanced, 0dBm -6/+21dB
Aux audio input	MPX (bw 120kHz): 1 x BNC female 50 Ohms or 5 kOhms; SCA: 1 x BNC female 50 Ohms
NICAM audio interface	2 x XLR 31 mini, 600 Ohms or 5 kOhms, balanced or unbalanced, 0dBm +/- 10dB
NICAM data interface	1 x BNC female, TTL 728kb/s external data, 1 x BNC female, TTL 728kb/s external clock

USER INTERFACE/ REMOTE CONTROL

Control/Monitoring	LCD and keyboard, Web GUI, SNMP
Ethernet	2x GbE

BE-TV-FAU/VII

Genesis Compact Transmitters



AC POWER

AC Input	110* to 240 V AC, 50/60 Hz, IEC320 C14 plug, single or dual phase
Power Factor	> 0.95
Frequency	50 or 60 Hz

**BE-TV600-FAU/VIII operates at reduced power @110/120VAC*

ENVIRONMENTAL

Operational Temperature Range	0° to 45°C (32° to 113°F)
Storage Temperature Range	-40 to +70°C
Relative Humidity	0% to 90%, non-condensing @ 45°C
Altitude	Up to 2,500 m (8,202 ft) above sea level
Cooling	Forced air-cooled
Acoustic Noise	≤65 dBA (front 1 m)
Dimensions (H x W x D)	1W, 25W and 100W: 1RU x 19" rack (dimensions: 44 H x 482 W x 461 D [mm]) 200W: 2RU x 19" rack (dimensions: 87 H x 482 W x 461 D [mm]) 600W: 5RU x 19" rack (dimensions: 222 H x 482 W x 620 D [mm])

BE-TV-FAU/VII

Genesis Compact Transmitters



UHF BAND IV-V RF OUT POWER (before filter) [W]	OFDM MODULATION (DVB-T/T2, ATSC 3.0, ISDB-T)	8VSB MODULATION (ATSC 1.0)	VSB MODULATION (ATV) @ IMD TYP. -62DB
BE-TV25-FAU	25Wrms (MER=42dB)	35Wrms (MER=42dB)	-
BE-TV50-FAU	50Wrms (MER=42dB)	75Wrms (MER=42dB)	-
BE-TV100-FAU	100Wrms (MER=40dB)	150Wrms (MER=40dB)	250Wps
BE-TV200-FAU	200Wrms (MER=36dB)	250Wrms (MER=36dB)	-
BE-TV600-FAU	600Wrms (MER=36dB)	750Wrms (MER=36dB)	500Wps

VHF BAND III RF OUT POWER (before filter) [W]	OFDM MODULATION (DVB-T/T2, ATSC 3.0, ISDB-T)	8VSB MODULATION (ATSC 1.0)	VSB MODULATION (ATV) @ IMD TYP. -62DB
BE-TV100-FAVIII	125Wrms (MER=40dB)	150Wrms (MER=40dB)	250Wps
BE-TV200-FAVIII	250Wrms (MER=36dB)	300Wrms (MER=36dB)	-
BE-TV600-FAVIII	600Wrms (MER=36dB)	750 Wrms (MER=36dB)	



BE-TV-FAU/VII

Genesis Compact Transmitters



BE-TV-FAU/VII

Genesis Compact Transmitters

Taking the next step is easy with Broadcast Electronics. Contact your sales representative today to discuss solutions that will work for you and your station(s).

To contact your BE sales representative, simply visit our website at bdcast.com or call 217.224.9600 and learn more about what BE has to offer.

BE manufactures complete RF systems for radio and TV. Our products encompass program generation, audio and data management, interfacility transport and analog and digital (*HD Radio and DRM transmission*).

They are used daily in more than 40,000 installations in nearly 100 countries. For over sixty years, BE pioneering developments have set industry standards for innovation and reliability, while providing broadcasters with new options for operational productivity and income generation. BE is headquartered in Quincy, Illinois, USA, and is represented worldwide by a network of local representatives.

©2021 Broadcast Electronics. All rights reserved. Specifications are subject to change without notice. Broadcast Electronics and the BE logo are registered trademarks of BEI Electronics LLC. All other trademarks are property of their respective owners.



BE - Broadcast Electronics is part of Elenos Group
more information www.elenosgroup.com
Headquarters in Italy

Telephone (217) 224-9600
4100 North 24th Street — Quincy, Illinois 62305-3606 U.S.A

www.bdcast.com



Broadcast Electronics

Tomorrow's TV Today